
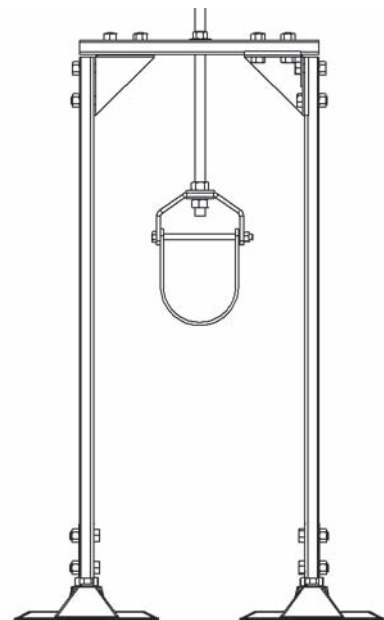


## INSTALLATION OF MODELS 6-H, 8-H, AND 16-H

1. Hanger or trapeze structure is shipped assembled with two or more leg supports, one top support, two or more gusset flanges with hardware, and the all-thread support with nuts and washers.
2. The bases are not attached to the hanger system for convenience and ease of shipping, and are shipped with nuts, washers, and bolts for each base.
3. Insert the legs of the hanger structure into both bases and tighten all bolts provided so bolts and gusset structure are tight on hanger legs. Required torque is 8 foot pounds. Eight pounds of torque should be applied to each bolt for correct tightness.
4. Clear all gravel and aggregate away from where base plates are to be positioned upon the roof membrane.
5. Install a MIRO Support Pad or an appropriate roof pad upon roof membrane. Pad must be compatible with the roof system. Comply with all MIRO and roof manufacturer loading and other requirements.
6. Position bases on pad.
7. Make sure to adjust all-thread fastened to the hanger in order to create positive and equal load on each support.
8. After installation is complete, check all bases to see that all rest upon the roof. Reinspect again three months later and every six months thereafter.

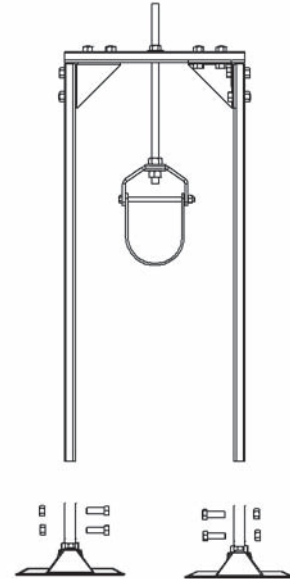

## INSTALACION DE MODELOS 6-H, 8-H AND 16-H

1. La estructura del colgador es enviada asenblada con dos o mas piezas. Un soporte de arriba, dos o más gasetas y los tornillos estan encluidos.
2. Las bases no estan pegadas con al colgador por su conveniensa y estan enviados con las tuercas para cada base.
3. Agreda las piernas en el colgador de cada base y aprieta cada tornillo parn que quede firme. Se le debe de aplicar ocho libras a cada uno de los tornillos para que apriete corectamente.
4. Recoje la basura o manten limpio el lugar donde trabajas para que siente bien el colgador.
5. Instala un MIRO Support Pad arriba del techo del colgador. El parche debe de estar compatible con el systema. Sigue las instrucciones del MIRO.
6. Posisiona las bases con el parche.
7. Ya que tengas todo completo revisa que las bases se sotengan sobre el techo.
8. As todo los agregamentos necesarios con el colgador y que el nivel este anivelado igual con cada soporte.
9. Vuelve a inspektar en tres meses y despues en sies mesca.

