





7½" x 10" SUPPORT PAD  
\*ACCESSORY ITEM\*

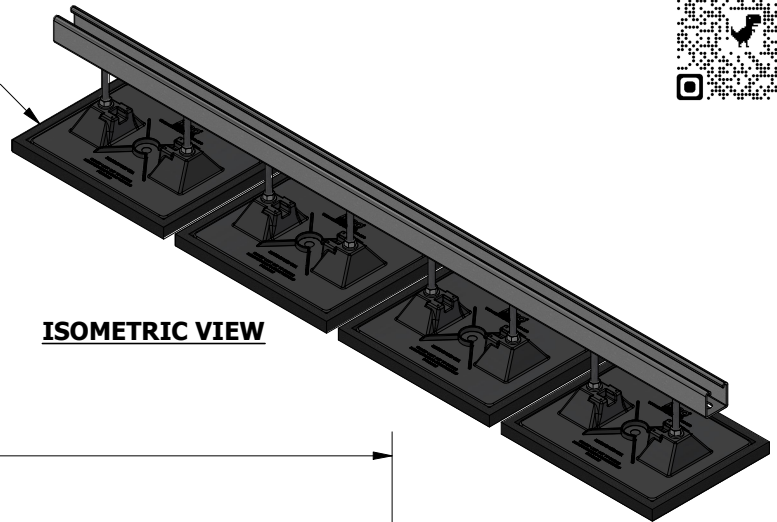


**ISOMETRIC VIEW**

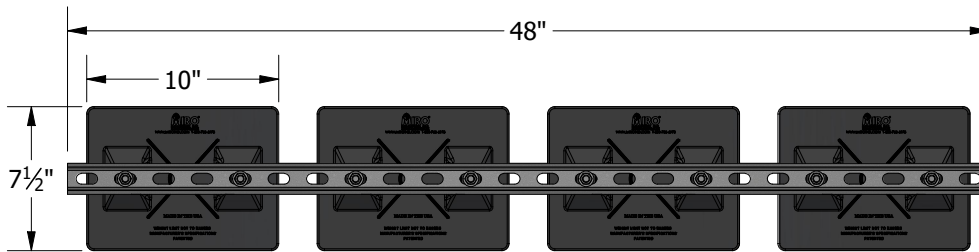

STRUT CLAMP  
\*ACCESSORY ITEM OR  
PROVIDED BY OTHERS\*

**TOP VIEW**

PIPE/CONDUIT FOR  
ILLUSTRATION ONLY

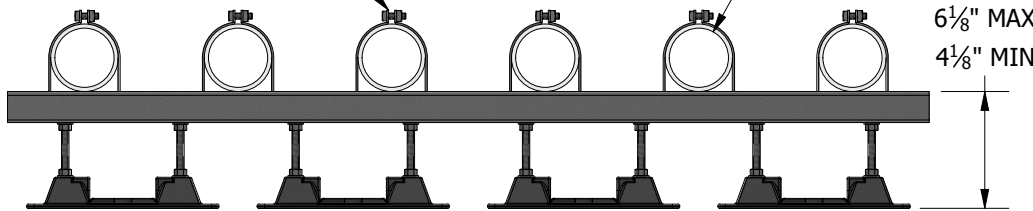

**END VIEW**

**SIDE VIEW**

**ACCESSORIES**

- Strut Clamp - Order to Pipe O.D.
- (4) 7½" x 10" Support pads
- Eternabond® 2-sided tape

**PRODUCT DESCRIPTION**

A pipe support with "strut" used to support roof-mounted electrical conduit, solar piping, gas pipes and other mechanical piping. Pipes rest on a 48" length of strut which is mounted on the bases. The pipes can be fastened by using the appropriate pipe clamp.

**KEY INFORMATION**

- Designed to support conduit (ganged) cable trays or other mechanical piping.
- Adjustable from the factory set maximum height of 6-1/8" down to a minimum height of 4-1/8"
- Maximum load is 172.5 lbs/ft. (3.0 psi) Make certain each support is properly elevated to evenly distribute weight at all support locations.
- Unit Weight: 12.22 lbs.
- Recommended spacing is not to exceed 10' centers depending upon the load.

**MATERIAL INFORMATION**

- Base Material: Polycarbonate
- 3/8"-16 SS 304 All-Thread
- 1-5/8"x1-5/8" 12 ga. HDG slotted strut
- HDG hardware

The information contained in this drawing is the sole property of MIRO Industries, Inc. Any reproduction in part or as a whole without written permission of MIRO Industries, Inc. is prohibited.

DATE:

JAN 2022

48-BASE STRUT-5