




TOP VIEW

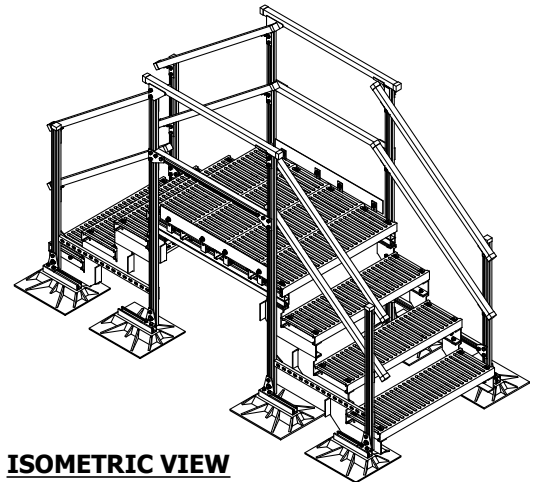

ISOMETRIC VIEW

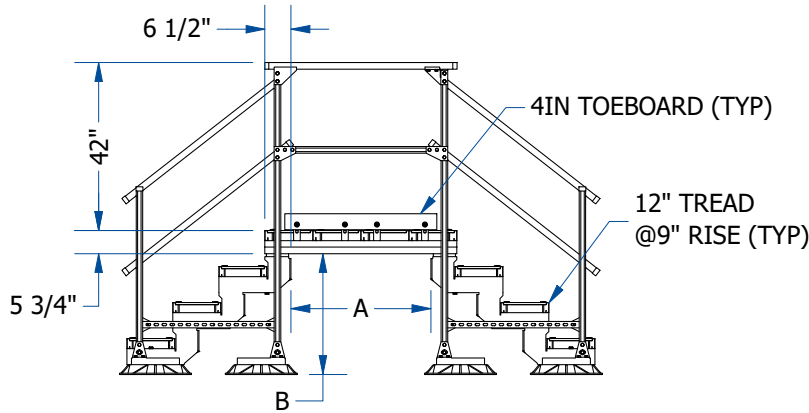

FRONT VIEW



SIDE VIEW

ACCESSORIES

- MIRO support pad
- Eternabond® 2-sided tape

PRODUCT DESCRIPTION

The MIRO Standard crossover is constructed with our patent pending J-Stringer brackets, our 16"x18" polycarbonate bases for proper load distribution, 12" non-slip planking, and 1-5/8" 12ga. strut framing.

MIRO Standard crossovers are designed to provide a set stair pitch of a 9" rise by an 11-1/2" run. The system also provides platform length adjustability in 12" increments from 48" long to 72" long.

MIRO Standard crossover structures are designed to meet OSHA 1910 Subpart D requirements for walking/working surfaces.

Anchorage of the MIRO Standard crossover to the building structure may be required for applicable lateral and uplift loading.

STANDARD-CO-HANDRAIL (INCHES)

	A	B	C	D
MODEL NAME	CLEARANCE SPAN	CLEARANCE HEIGHT	STEP QUANTITY	TOTAL LENGTH
C-35x30H	35	30-1/4	3	120-3/4
C-47x30H	47	30-1/4	3	132-3/4
C-59x30H	59	30-1/4	3	144-3/4
C-35x39H	35	39-1/4	4	143-3/4
C-47x39H	47	39-1/4	4	155-3/4
C-59x39H	59	39-1/4	4	167-3/4
C-35x48H	35	48-1/4	5	166-3/4
C-47x48H	47	48-1/4	5	178-3/4
C-59x48H	59	48-1/4	5	190-3/4

MIRO Standard Crossovers - Handrail are shipped partially assembled. (Field assembly is required)