
HD MECHANICAL QUOTE TEMPLATE



Job Name:

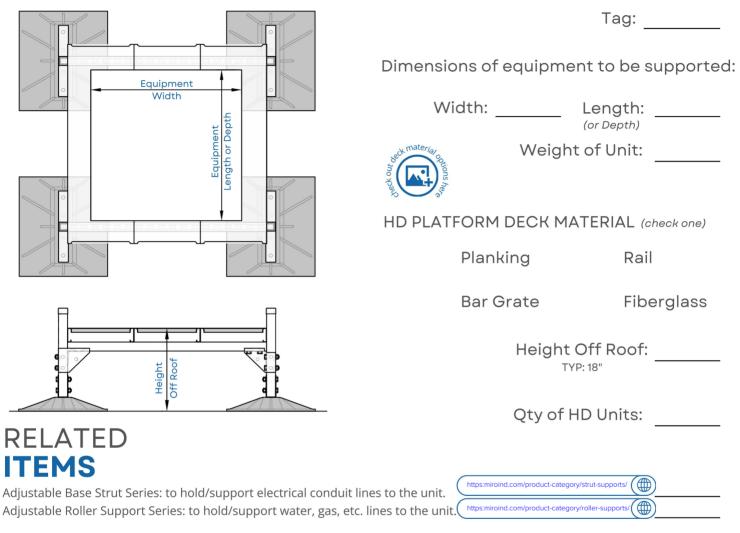

KEY INFORMATION

- Designed to support mechanical units, such as: heat pumps, condensing units, VRFs, and other RTUs.
- Designed to meet project specific dimensions with adjustability as specified.
- Typical support deck is constructed of 12" x 2-1/2" x 18 ga. metal planking, however, bar grate, rail, or fiberglass may be specified or required depending on loading or preference.
- Support is designed to not exceed 3.0 psi to the finished roof surface under each base.
- Base material: Polycarbonate
- All metal parts are galvanized.
- Non-anchored supports do not provide significant resistance to wind or seismic loading. Contact MIRO Industries for wind and seismic solutions.

ACCESSORIES

Support pad, disconnect (electrical box connection), and ${\tt Eternabond^{\circledast}}$ two-sided tape.

This document, attachments, and all of the information herein are the property of MIRO Industries, Inc. The information contained is loaned, subject to return upon demand, and not to be used directly or indirectly in any way detrimental to MIRO's interest. Further, the information contained herein shall not be used, in whole or in part, except when allowed by written authorization from MIRO Industries, Inc. 2003-2024