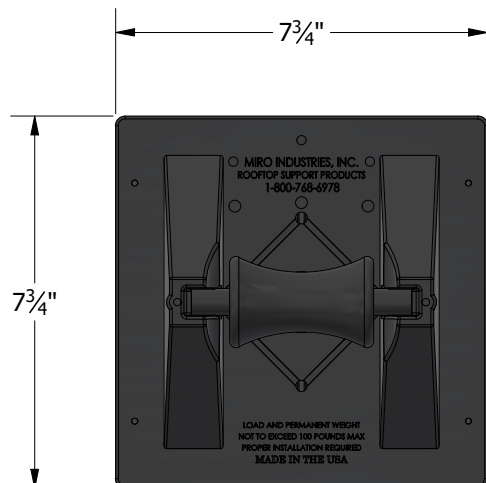
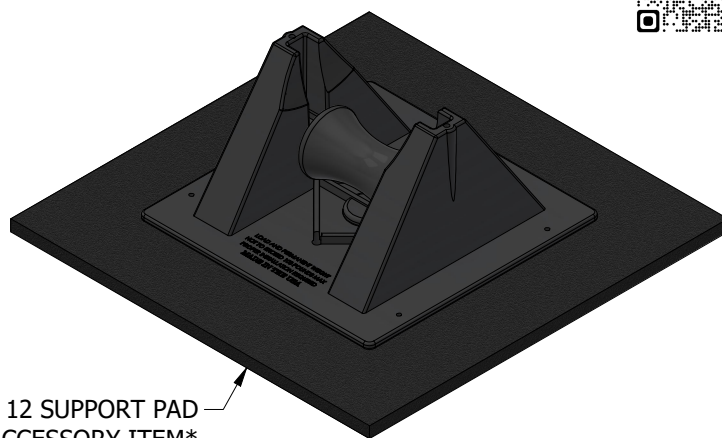
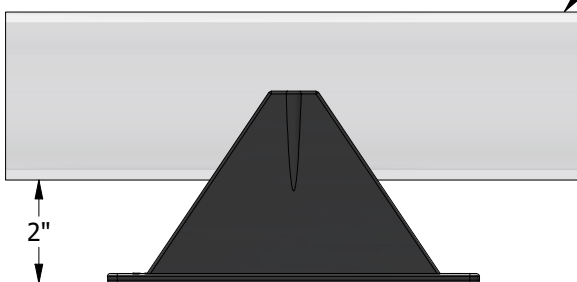


**TOP VIEW**12 x 12 SUPPORT PAD
*ACCESSORY ITEM***ISOMETRIC VIEW****SIDE VIEW**3-R SPACER
*ACCESSORY ITEM***END VIEW****ACCESSORIES**

- 3-R-2 pipe guide
- 3-R spacer
- Support pad
- Eternabond® 2-sided tape

PRODUCT DESCRIPTION

A "roller-bearing" pipe support used to support roof-mounted gas pipes, electrical conduit, solar piping and other mechanical piping. Unique design absorbs thermal expansion and contraction of pipes thus preventing damage to the roof membrane. Pipes rest on a polycarbonate resin roller and a rod situated in a polycarbonate resin seat.

KEY INFORMATION

- Support is optimized to carry up to a 3" pipe.
- Maximum pipe OD for the support is 3-3/4".
- Pipe clearance is 2"
- 3-R Spacer accessory adds an additional 2" of height per spacer. Manufacturer recommends a maximum of (2) spacer be used.
- Maximum load is 118 lbs. based on 3.0 psi to the roof deck. Even load required.
- Unit Weight: 1.03 lbs.
- 24 per case (26 lbs.)
- Recommended spacing is not to exceed 7' centers depending upon the load.
- 20 Year Warranty

MATERIAL INFORMATION

- Base Material: Polycarbonate
- Axle and Roller Material: Polycarbonate